

VAULT 2i Network Streamer, CD-Ripper & Music Library

Owner's Manual

Welcome to Bluesound, Hi-Fi for the Wi-Fi generation.

Bluesound transforms your local digital music library by putting the music of your life right at your fingertips. The clutter of CDs is relegated to a previous era! Your smartphone, desktop or tablet running the Bluesound App now controls your music.

Your Bluesound music system is also a sophisticated Internet streaming device that allows you to listen to a wide range of Internet music service providers. Bluesound also provides access to music subscription services featuring extensive catalogs of millions of songs streamed to you over the internet in real time. TuneIn Radio makes every radio station in the world a local station via the magic of the internet.

To take full advantage of all these Bluesound capabilities requires a robust wired home network and a reliable high speed Internet connection, provided by a DSL or Cable modem. Internet access must be contracted and installed by your local Internet Service Provider. For remote areas there are satellite options for high speed internet access.

Before signing on to a music subscription or cloud service we suggest that you review your Internet service plan and be sure you have enough internet speed and bandwidth to provide uninterrupted streaming. Most internet service providers offer multiple plans and can help you make the best choice.

For detailed instructions on how to control your Bluesound player, visit our website at: www.bluesound.com.

Included Accessories



Stereo RCA to RCA Cable



3.5mm Stereo mini Plug to RCA Cable



120V AC Power Cord




230V AC Power Cord



Ethernet Cable



Mini Jack to Toslink Adaptor

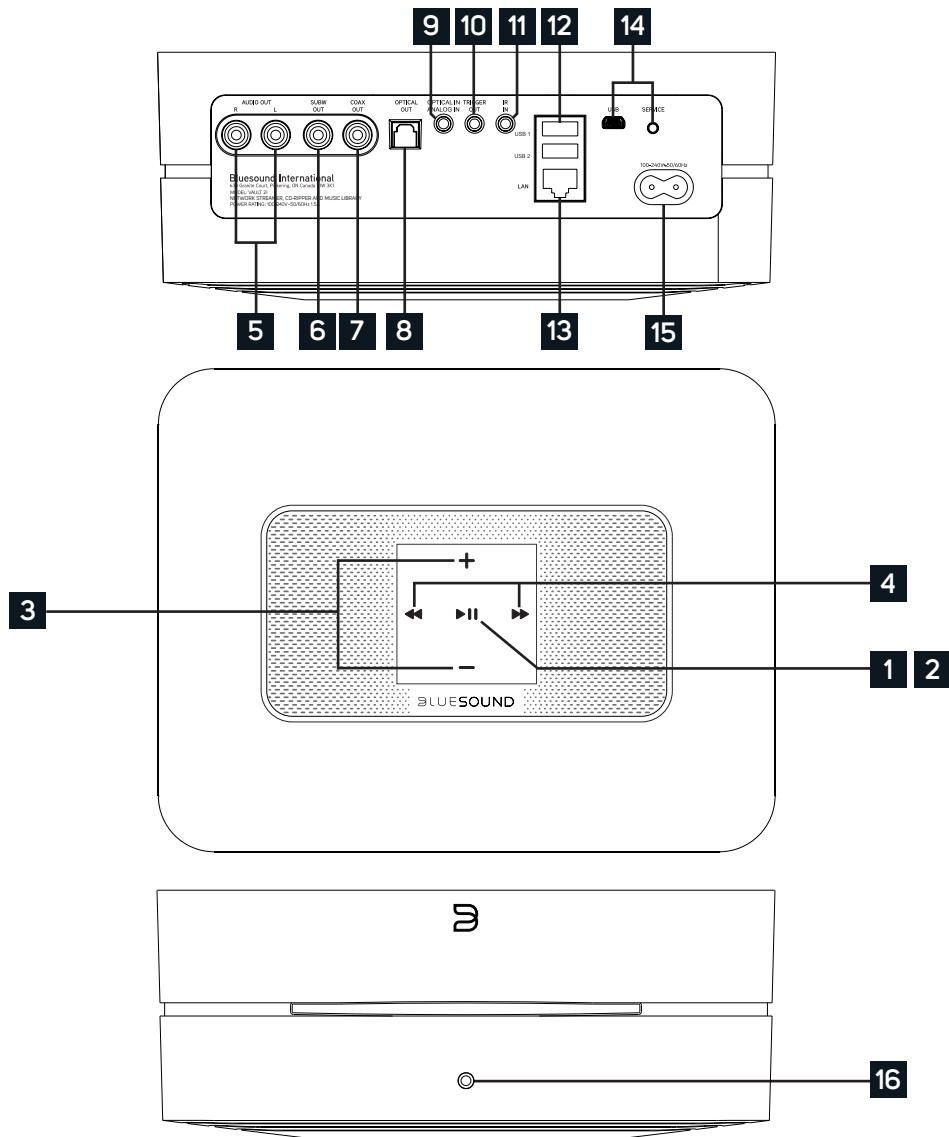

1 STATUS INDICATOR:

Below is a table of the LED blink codes and their corresponding descriptions.

LED BLINK CODE	DESCRIPTION
Short blue flash, then red	Powering up, rebooting the unit
Flashing green	Connecting to Network shares
Solid red	Cannot boot; drive error
Red pulse	No Internet gateway
White pulse	Software update available
Solid red	Upgrade mode
Alternate flashing red and green	Upgrading...
Flashing blue	Mute mode
Solid white	Indexing
Solid blue	Connected to Network – ready to use with Bluesound App
Flashing red	Factory reset in progress
Solid purple	Hotspot timed out

- 2 PLAY/PAUSE BUTTON:** This button has multiple functions – a visual indicator of network connectivity and a PLAY/PAUSE button. For a full listing of LED Blink Codes, please see #1 – Blink Codes. For an ungrouped Player, press the button to Play and Pause the stream. If listening to an Internet radio stream, the Pause function will work for 30 seconds. At this point, the buffer is full and the stream will Stop. When a Player is grouped, pressing the PLAY/PAUSE button will Mute that Player while other Players continue the stream. The Player's LED will flash blue when muted.
- 3 +, - (VOLUME):** Toggle either button to vary volume level. Volume level will not change if you press and hold either button.
(+): Increase volume level
(-): Decrease volume level
- 4 PREVIOUS TRACK/NEXT TRACK:** These buttons can be used to go back to the previous track ◀◀ or skip to the next track ▶▶ in your current playlist.
- 5 AUDIO OUT:** Connect to the corresponding analog audio input of an amplifier, receiver or stereo system.
- 6 SUBW (SUBWOOFER) OUT:** A Subwoofer can also be connected directly to the VAULT 2i. Connect SUBW OUT to a powered ("active") subwoofer.
- 7 COAX OUT:** Using a coax cable (not provided), connect one end to the COAX OUT of the VAULT 2i and the other end to the corresponding coax input of compatible devices such as receivers, computer soundcards or other digital processors.
- 8 OPTICAL OUT:** Using a Digital Optical cable (not provided), connect one end to the OPTICAL OUT of the VAULT 2i and the other end to the corresponding digital audio input of compatible devices such as receivers, computer soundcards or other digital processors.
- 9 OPTICAL IN/ANALOG IN:** Using a 3.5mm Stereo Audio Cable (provided), connect one end to the Analog In of the VAULT 2i and the other end to the corresponding analog output of other compatible devices. The source will show as an Analog Input in the Navigation Drawer of the Bluesound app. Using the 3.5mm Mini Jack to Toslink adaptor (included with the VAULT 2i), a digital optical source can also be added. This will appear as Optical Input in the Navigation Drawer.
- 10 TRIGGER OUT :** A 12V DC signal is available using TRIGGER OUT. The 12V DC signal can be used to control or activate other external devices equipped with a corresponding 12V trigger input using a 3.5mm mono audio cable.
- 11 IR IN :** An infrared extender can be connected to allow for programmable learning remotes to control volume and source selection when a VAULT 2i is stored in a way that the front panel IR sensor is not visible.
- 12 USB (TYPE A):** Connect a USB mass storage device or Bluetooth adaptor to the USB input. Typical USB mass storage devices compatible with the VAULT 2i include portable flash memory devices and external hard drives (FAT32 formatted).
- 13 LAN PORT:** To setup the VAULT 2i, a LAN port for a wired ethernet connection is required. Using the Ethernet cable provided, connect one end of the Ethernet cable to the LAN port of your wired Ethernet broadband router and the other end to the VAULT 2i's LAN port.
- 14 SERVICE:** Use the SERVICE port in conjunction with USB (Type B Mini) to initially load firmware on the Player. This is not for consumer use. Only Authorized Bluesound Service personnel can access this USB port and SERVICE control button.
- 15 AC MAINS INPUT:** The VAULT 2i comes supplied with two separate AC power cords. Select the AC power cord appropriate for your region. Before connecting the plug to the wall outlet, connect firmly the other end of the AC power cord to VAULT 2i's AC Mains input socket. Never force the plug into a wall outlet. An adaptor may be necessary in certain regions. Always disconnect the plug from the wall outlet first, before disconnecting the cable from the VAULT 2i's AC Mains input socket.
- 16 FRONT PANEL HEADPHONE JACK:** A 3.5mm headphone jack is located on the front of the VAULT 2i.

UWAGA!

TO JEST PRZYWRÓCENIE USTAWIEŃ FABRYCZNYCH TWOJEGO ODTWARZACZA. WSZYSTKIE DOSTOSOWANIA, W TYM KONFIGURACJA SIECI WI-FI, UDOSTĘPNIENIA PLIKÓW I ZAPISANE LISTY ODTWARZANIA ZOSTANĄ UTRACONE. PO ZAKOŃCZENIU BĘDZIE TRZEBA JE ODTWORZYĆ. TEN PROCES JEST ZALECANY TYLKO W PRZYPADKU, JEŚLI TWÓJ ODTWARZACZ NIE DZIAŁA I AKTUALIZACJA OPROGRAMOWANIA PRZEZ INTERNET NIE POWIODŁA SIĘ. W RAZIE JAKICHKOLWIEK PYTAŃ LUB WĄTPLIWOŚCI SKONTAKTUJ SIĘ Z AUTORYZOWANYM PRZEDSTAWICIELEM KLIENTA BLUESOUND PRZED KONTYNUACJĄ!

Instrukcja przywracania ustawień fabrycznych:

1. Odłącz odtwarzacz od zasilania.
2. Odczekaj 30 sekund.
3. Podłącz ponownie do źródła zasilania.
4. Gdy dioda LED zmieni kolor na czerwony, naciśnij i przytrzymaj przycisk ODTWARZANIA/WSTRZYMANIA lub FUNKCJI. Dioda LED natychmiast zmieni kolor na zielony, a następnie z powrotem na czerwony – nadal trzymaj przycisk wciśnięty przez 30 sekund.
5. Po 30 sekundach dioda LED zacznie migać na czerwono – wtedy zwolnij przycisk.
6. Wszelkie dostosowania odtwarzacza Bluesound zostaną usunięte i przywrócone do ustawień fabrycznych.

WAŻNE: Zdjęcie palca z przycisku ODTWARZANIA/WSTRZYMANIA lub FUNKCJI w dowolnym momencie, zanim dioda LED zacznie migać na czerwono, spowoduje anulowanie przywracania ustawień fabrycznych i pozostawienie odtwarzacza w trybie aktualizacji. Po prostu wykonaj kroki ponownie, aby przywrócić ustawienia fabryczne odtwarzacza.

Będziesz wiedzieć, że przywrócenie ustawień fabrycznych powiodło się, jeśli odtwarzacz powróci do trybu hotspota (połączenie bezprzewodowe – dioda LED zacznie świecić na zielono). Jeśli odtwarzacz jest podłączony do sieci za pośrednictwem przewodowego połączenia Ethernet, po prostu połącz się tak, jakby był nowym odtwarzaczem (dioda LED zacznie świecić na niebiesko).

BLUESOUND®

© Bluesound International. Bluesound, stylizowany logotyp „B”, wyrażenie „HiFi for a wireless generation”, HUB i wszystkie inne nazwy produktów Bluesound i slogany są znakami towarowymi lub zastrzeżonymi znakami towarowymi firmy Bluesound International, oddziału Lenbrook Industries Limited. Wszystkie inne logo i usługi są znakami towarowymi i usługowymi ich odpowiednich właścicieli.